



**0.1–10 bar**  
PRESSURE RANGE

**max. 22l/min**  
**at 3 bar**  
FLOW RATE



**2 × M10 × 1**  
**Eco Brass**  
INPUT

**JG, 3/8" external**  
**thread, 1/2" external**  
**thread Eco Brass**  
OUTLET

## TWINLEVEL<sup>o</sup> TLC Temperature

THE COMPACT THERMOSTATIC MIXER

TLC Temperature is a compact thermostatic mixer for kitchen fixtures, bathroom sinks, and showers. The combination of powerful drive and individually sealable Flühs ceramic cartridge guarantees exceptional quality and durability. Two processors provide continuous monitoring of both the functions and the electronics. TLC Temperature is hywise-compatible and easy to integrate into the water management system.

Multiple operating concepts and enhancements allow for fixtures that are especially attractive and innovative. In addition, an optional TLC Flow H1 can be connected to control the water flow.

The Multilevel Dispenser (MLD) transforms kitchen fixtures into fully functional kitchen appliances. A single unit can dispense up to three different types of water – boiling, sparkling, or filtered.

### RELIABLE AND HYGIENIC

Ceramic cartridge from Flühs  
Membrane-free design with zero dead space

### QUICKACCESS

Three temperature settings and programmable flow rate


### HYWISE-COMPATIBLE

Easy integration into the digital water management system

**Oblamatik AG**  
Gäuggelstrasse 7  
CH-7000 Chur

T +41 81 286 70 00  
sales@oblamatik.ch  
oblamatik.ch



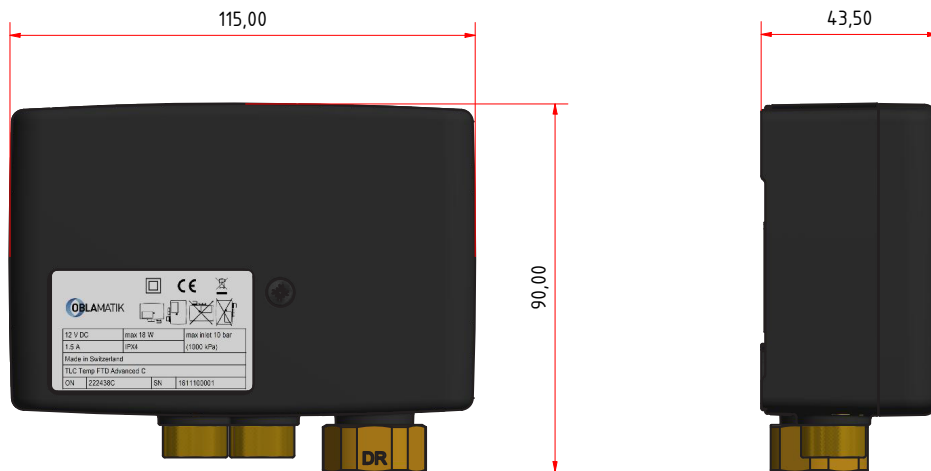

**DIMENSIONS** 100 × 70 × 40 mm

## Specifications

### TECHNICAL DATA

#### ELECTRONICS

##### POWER SUPPLY

12 VDC

##### POWER CONSUMPTION

Standby < 1 W, max. 15 W

##### ELECTRICAL OUTPUTS

Max. 3 external actuators  
(drain valve and solenoid valve)

#### WATER PATH

##### INPUT

2 × M10 × 1 Eco Brass

##### OUTLET

JG, 3/8" external thread,  
1/2" external thread Eco Brass

##### FLOW RATE

max. 22 l/min at 3 bar,  
open outlet

##### PRESSURE RANGE

0.1–10 bar

### USER INTERFACES

- > TLI Air
- > TLI Wheel
- > TLI Mini
- > TLI Exchange
- > Netlevel
- > RS232
- > UART

#### OPTIONAL

Netlevel IoT module for voice control  
hywise Air, AirCon, or WireCon  
for integration into the  
hywise water management system