

**Scenes**  
CUSTOMIZABLE

**White OLEDs,**  
**128 × 128 px**  
DISPLAY



**3 custom**  
QUICKACCESS SETTINGS

## TWINLEVEL<sup>o</sup> TLI Air

THE SMART OPERATING DEVICE FOR THE DIGITAL FUTURE

TLI Air is a wireless, universal user interface. It can communicate with all TLC products and hywise-compatible components.

Using its patented TLI functions, TLI Air controls the water temperature and flow rates on a single fixture. It can also be used to manage functions and individual profiles across numerous devices – from hygienic flushing all the way to programmable showerheads.

The integrated display offers access to information about the current processes at all times.

TLI Air can be installed anywhere: it adheres to all smooth surfaces without requiring an additional holder. The rechargeable battery is wirelessly charged via induction. The (optional) integrated proximity sensor switches the device on automatically when the user approaches. Welcome to the future.

#### HYWISE-COMPATIBLE

Easy integration into the digital water management system

#### COMPLETE CONTROL

Controls all TLC mixing and flow valves as well as hywise-compatible devices

#### FREELY POSITIONABLE

Adheres to all smooth surfaces without a holder

#### WIRELESS CHARGING

Convenient inductive charging

#### INTEGRATED DISPLAY

White OLEDs, 128 × 128 pixels


#### INTEGRATED PROXIMITY SENSOR

Optional presence detector

**Oblamatik AG**  
La-Nicca-Strasse 12  
CH-7000 Chur

P +41 81 553 53 00  
sales@oblamatik.ch  
oblamatik.ch



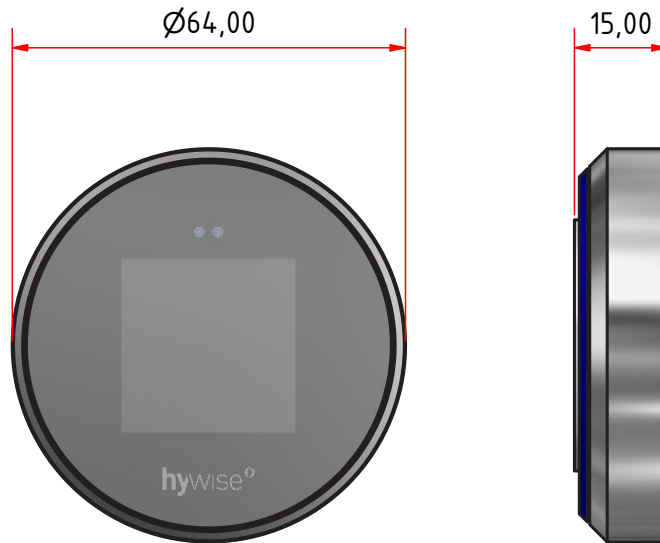

**DIMENSIONS** 64.2 × 15 mm

# Specifications

## TECHNICAL DATA

### DISPLAY

Displays battery charge as well as set temperature (°C or °F) and flow rate

### RECHARGEABLE BATTERY

Lithium polymer battery

### SENSOR

Proximity sensor allows for hands-free activation

### HYWISE SCENES

Visualization of scenes and scene steps

### PROTECTION CLASS

IP67

### ACCESSORIES

Charging station for wall installation

## FUNCTIONS

### QUICKACCESS

Three programmable settings for temperature and flow rate

### TOGGLE

Toggle between two water outlets

### OPERATING PAUSE

45 s deactivation

### AUTO SWITCH-OFF

Deactivates after 10/45 min of inactivity

### SCALDING PROTECTION

Gradual increase to temperatures greater than 40° C

### THERMAL DISINFECTION

Heats and flushes fixtures with 70° C water for 3 min

### DIAGNOSTIC MODE

Functional test for TLC valves and error indicator

### DRAIN VALVE

Open and close the drain valve

### FACTORY SETTINGS

Reset to factory settings

## COMPATIBILITY

- > TLC Temperature
- > TLC Double
- > TLC Triple