




max. 15 l/min
at 3 bar
FLOW RATE

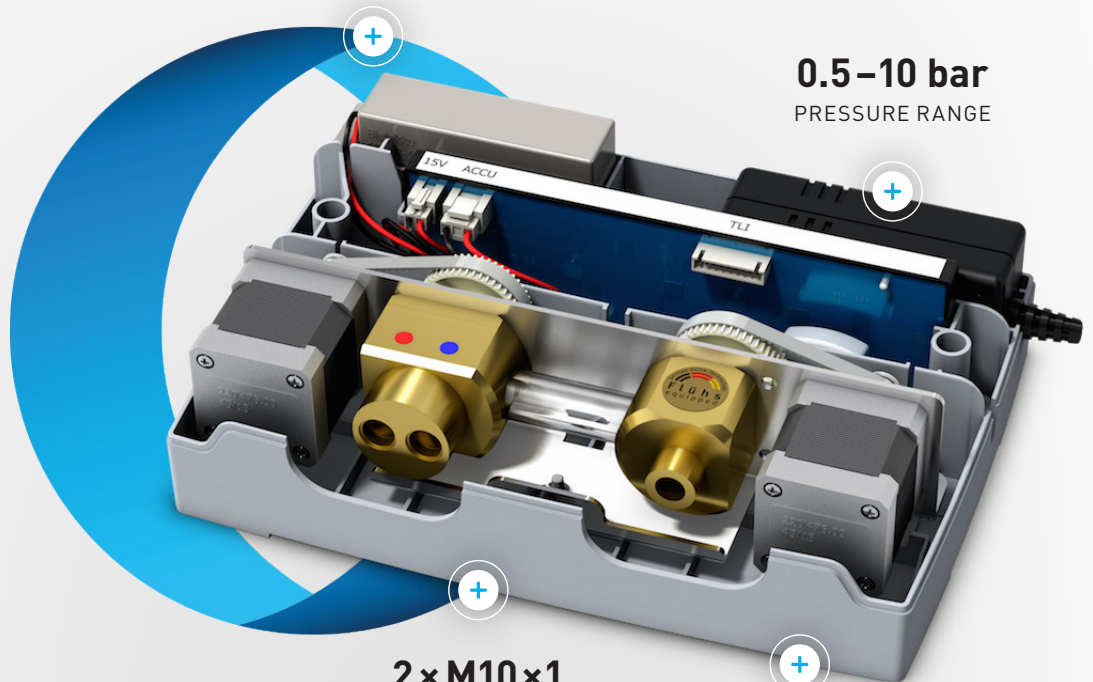

0.5–10 bar
PRESSURE RANGE

2 × M10 × 1
INPUT

1 × 3/8" external
thread
OUTLET

TWINLEVEL^o TLC Single

THE HIGH-QUALITY MIXER

TLC Single is a high-quality mixer with flow rate control for kitchen fixtures and bathroom sinks. The combination of powerful drives and individually sealable Flühs ceramic cartridges guarantees exceptional quality and durability. The water path has a single outlet and is completely encased in brass. The connections consist of a plug nipple with 0.5" internal thread and a press connection.

TLC Single is actuated by a TLI or manufacturer-specific interface. Three processors provide continuous monitoring of both the functions and the electronics. Thanks to the (optional) integrated rechargeable battery, TLC Single can still be used even during a power outage

RELIABLE AND HYGIENIC

Ceramic cartridge from Flühs
Membrane-free design with zero dead space

QUICKACCESS

Three temperature settings and programmable flow rate


FAIL-SAFE

Battery operation is activated in the event of a power outage
Self-monitoring multiprocessor technology

Oblamatik AG
La-Nicca-Strasse 12
CH-7000 Chur

P+41 81 553 53 00
sales@oblamatik.ch
oblamatik.ch



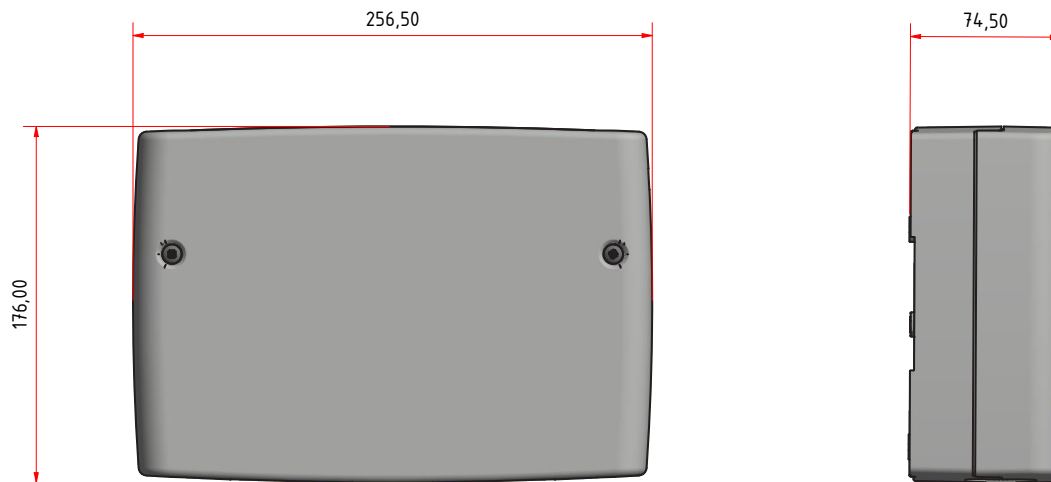

DIMENSIONS 260 × 175 × 75 mm

Specifications

TECHNICAL DATA

ELECTRONICS

POWER SUPPLY

100–240VAC / 50–60Hz

POWER CONSUMPTION

Standby < 0.5W, max. 45W

ELECTRICAL OUTPUTS

Max. 4 external actuators
(drain valve and solenoid valve)

WATER PATH

INPUT

2 × M10 × 1

OUTLET

1 × 3/8" external thread

FLOW RATE

max. 15 l/min at 3 bar,
open outlet

PRESSURE RANGE

0.5–10 bar

USER INTERFACES

- > TLI Wheel
- > TLI Remote Wheel